




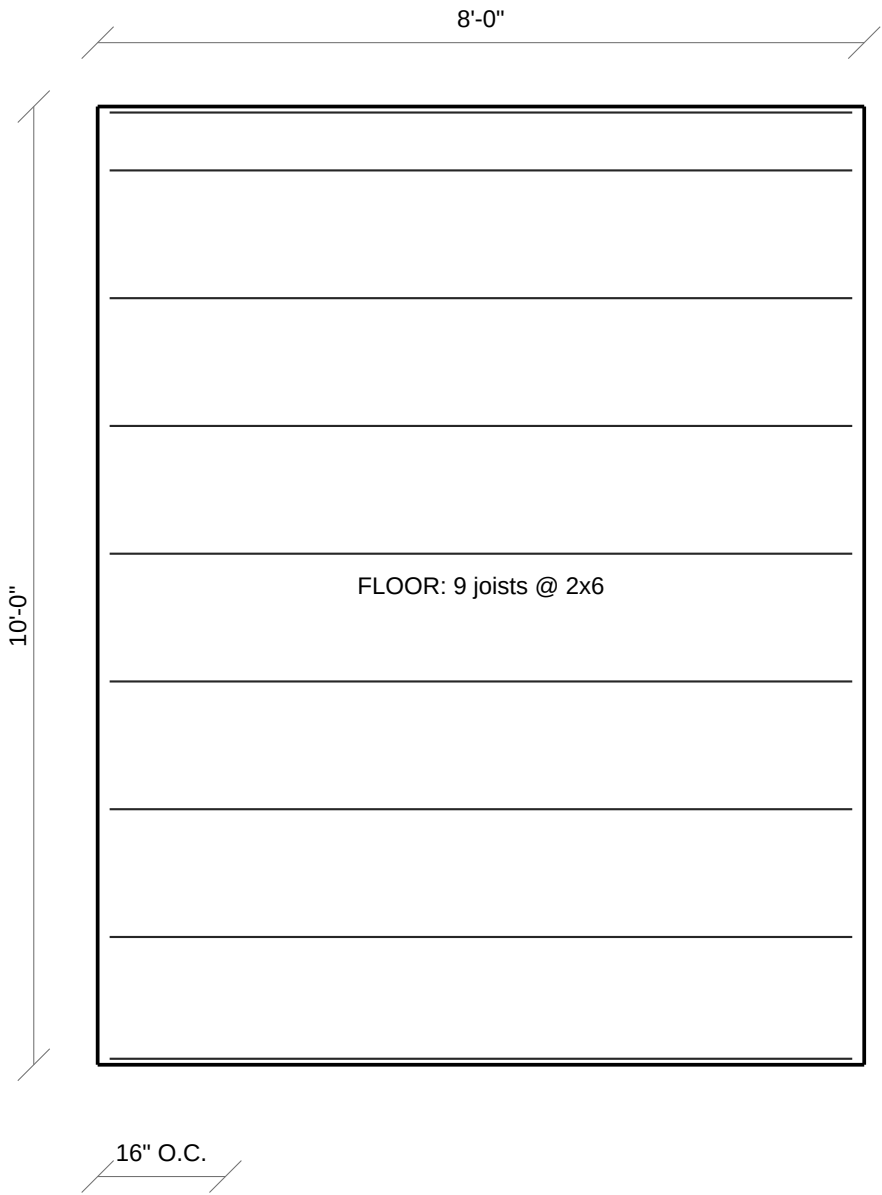


FRONT WALL FRAMING

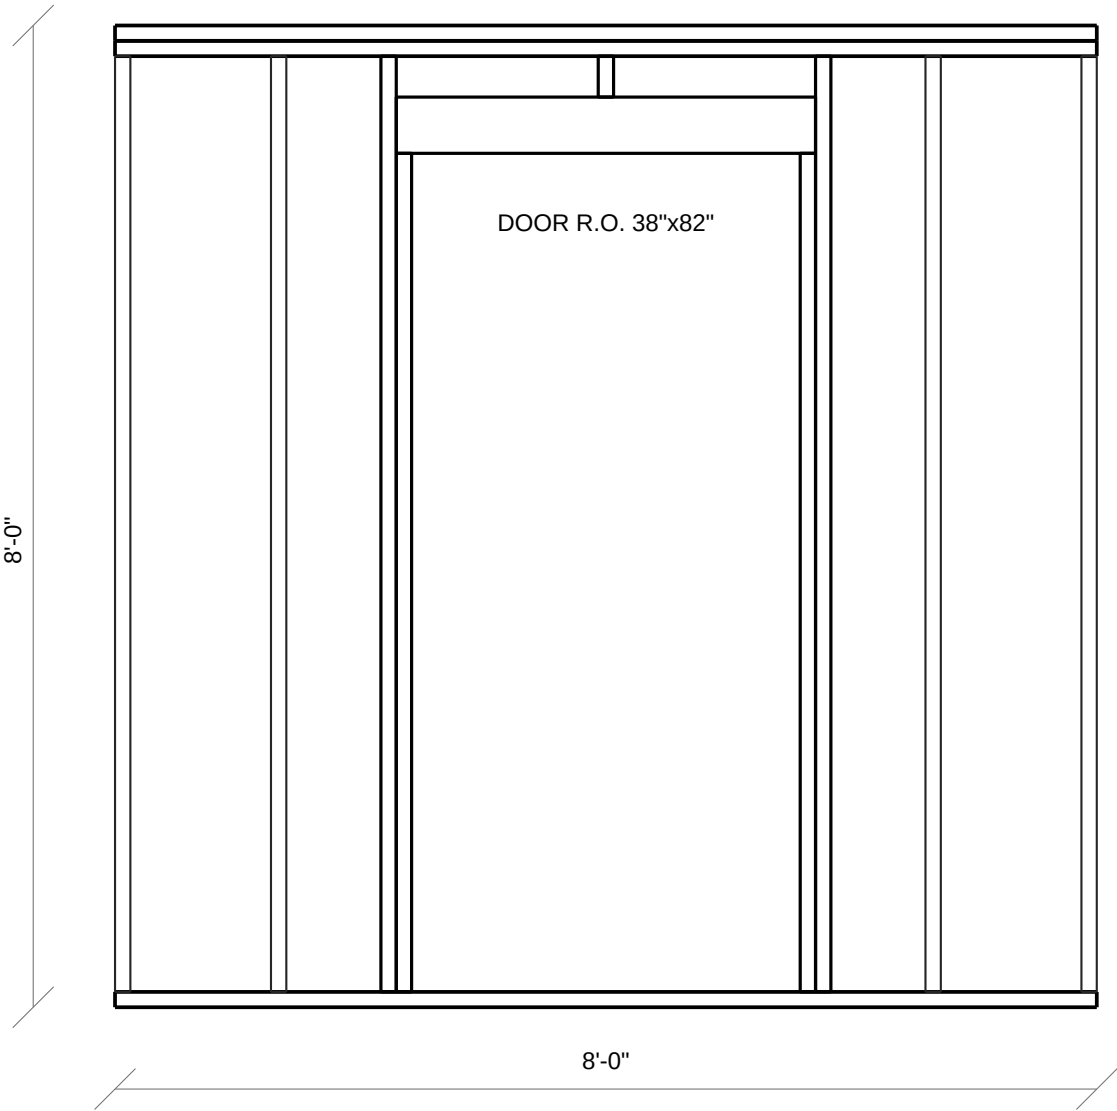


BACK WALL FRAMING

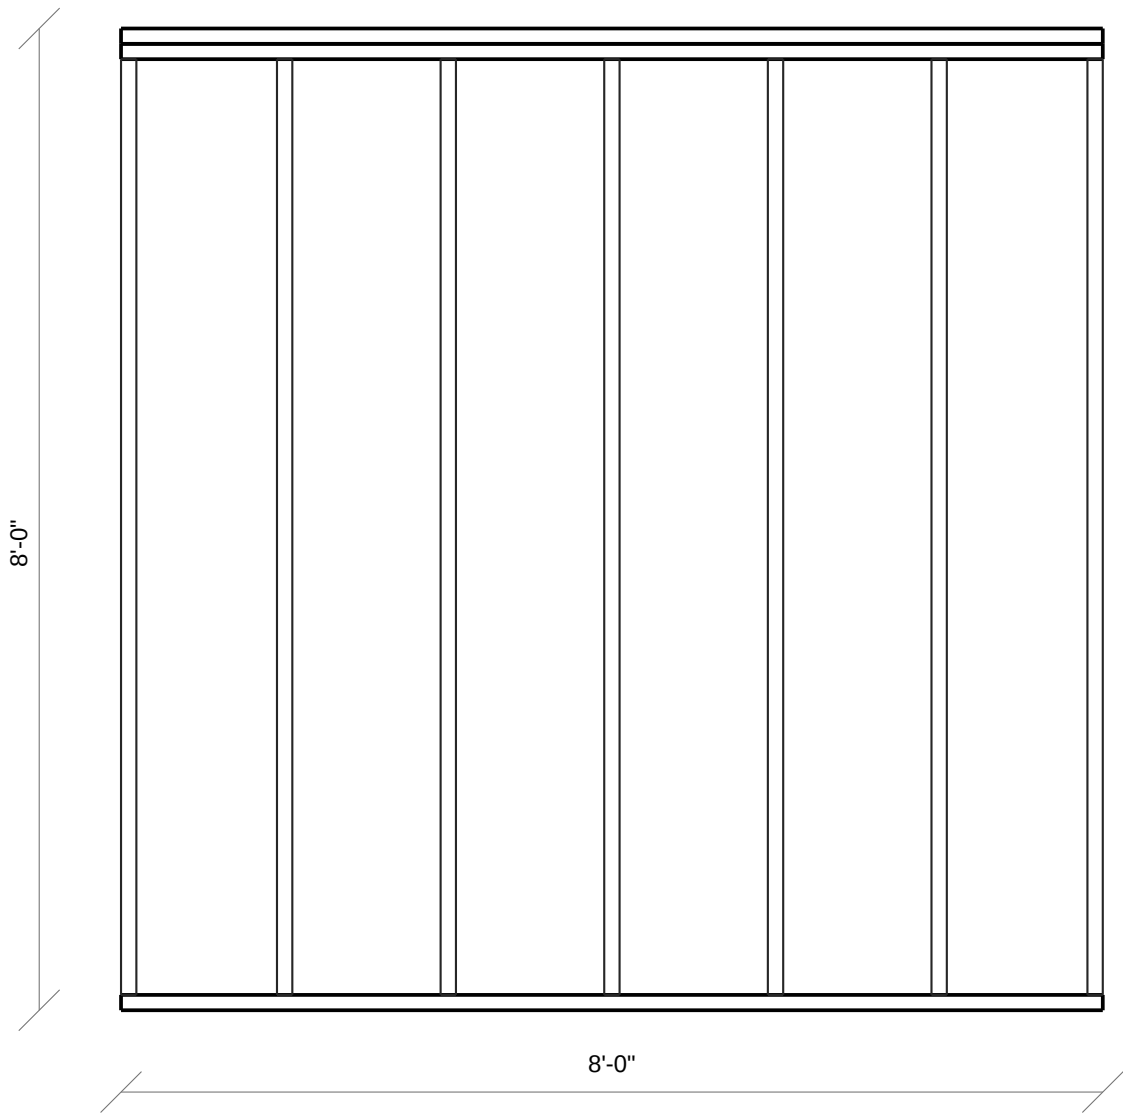

LEFT WALL FRAMING

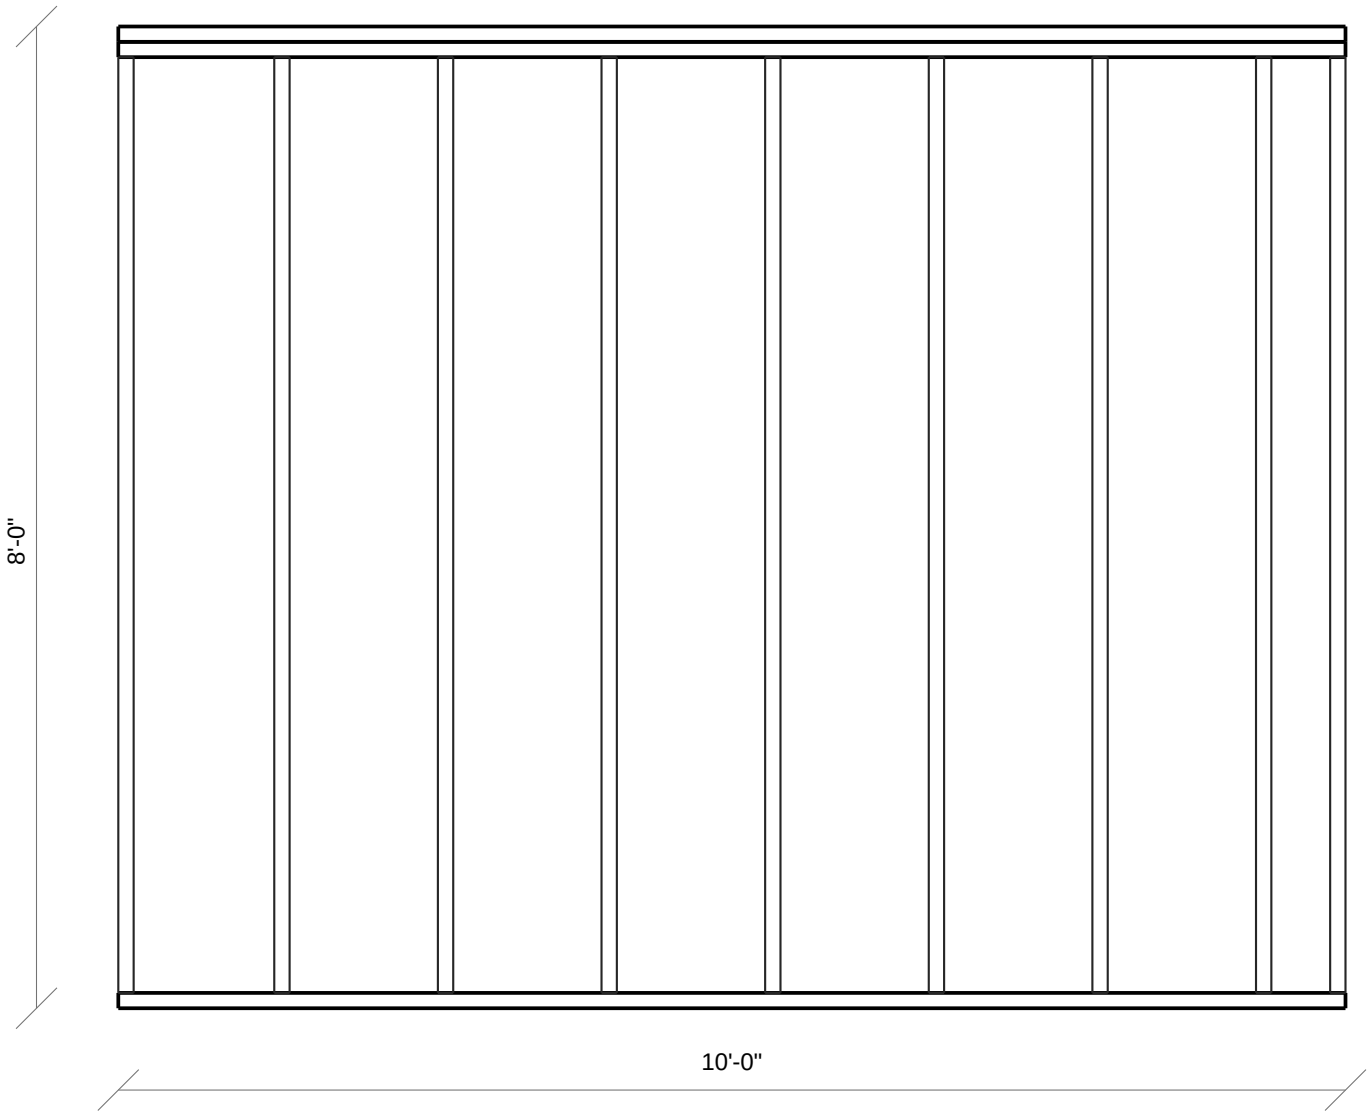

RIGHT WALL FRAMING

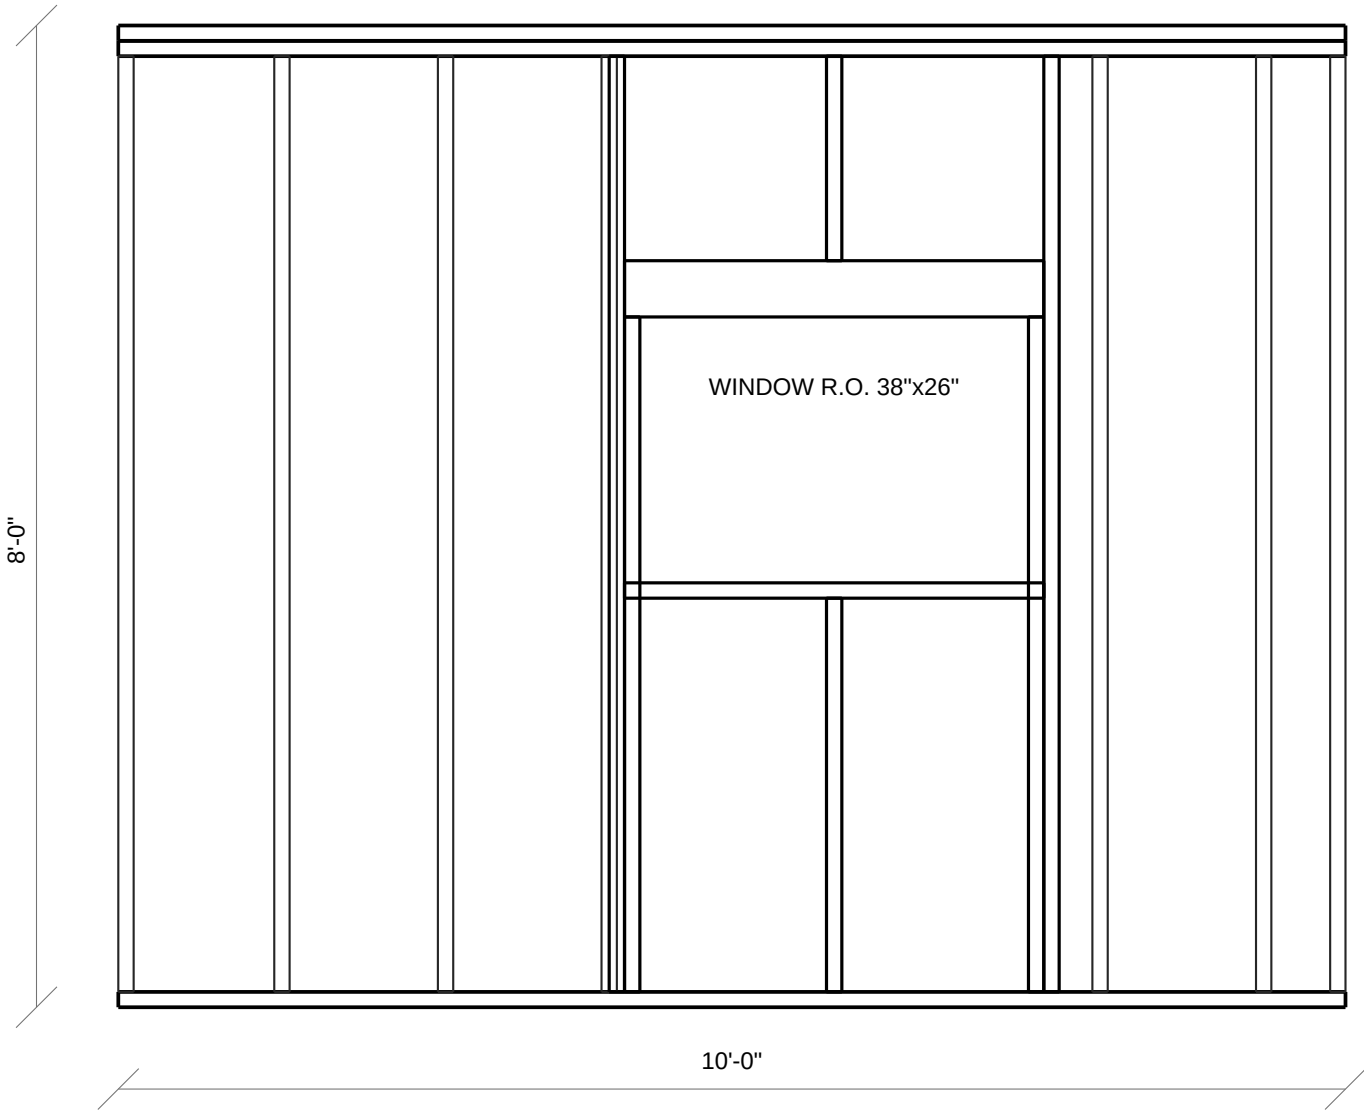

LUMBER CUT LIST (stock-length optimized)

SIZE	STOCK	QTY	CUT PATTERN (per stick)	DROP
2x4	10'	x6	10'-0"	0"
2x4	8'	x6	8'-0"	0"
2x4	8'	x3	7'-7-4/8" + 4"	0-3/8"
2x4	8'	x28	7'-7-4/8"	4-4/8"
2x4	8'	x2	6'-10"	1'-2"
2x4	8'	x2	5'-6" + 1'-8"	9-7/8"
2x4	8'	x1	3'-5" + 3'-2-4/8"	1'-4-3/8"
2x4	8'	x1	3'-2-4/8" + 3'-2-4/8"	1'-6-7/8"
2x4	8'	x1	1'-8"	6'-4"
2x6	10'	x2	10'-0"	0"
2x6	8'	x9	7'-9"	3"
2x6	8'	x2	3'-5" + 3'-5"	1'-1-7/8"

Totals: 63 sticks | 382.7 board-ft | 5.5% offcut waste

PARTS / HARDWARE LIST

ITEM	UNIT	QTY
Joist hanger (2x6)	ea	14
Hanger nails (1.5")	lb	1.6
16d framing nails	lb	4.0
Sill anchor bolts	ea	6
Hurricane ties	ea	35