


END ELEVATION (CRANK SIDE)

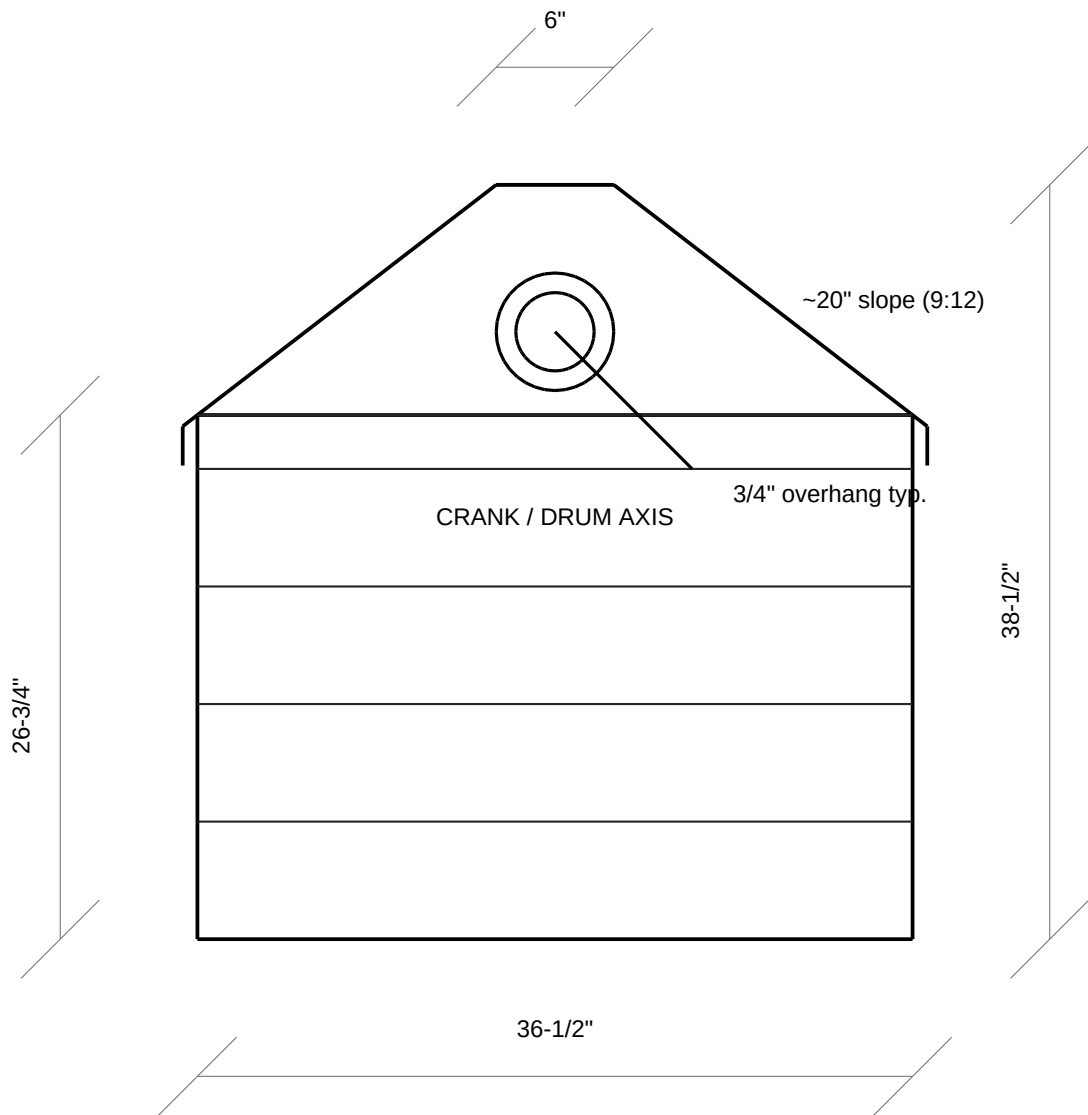

SIDE ELEVATION

LID LIFTS (18" panel, gas struts)


3/4" overhang

ROOF SLOPES TOWARD VIEWER (lid = house-side plane)


26-3/4"

38-1/2"



45-1/4"

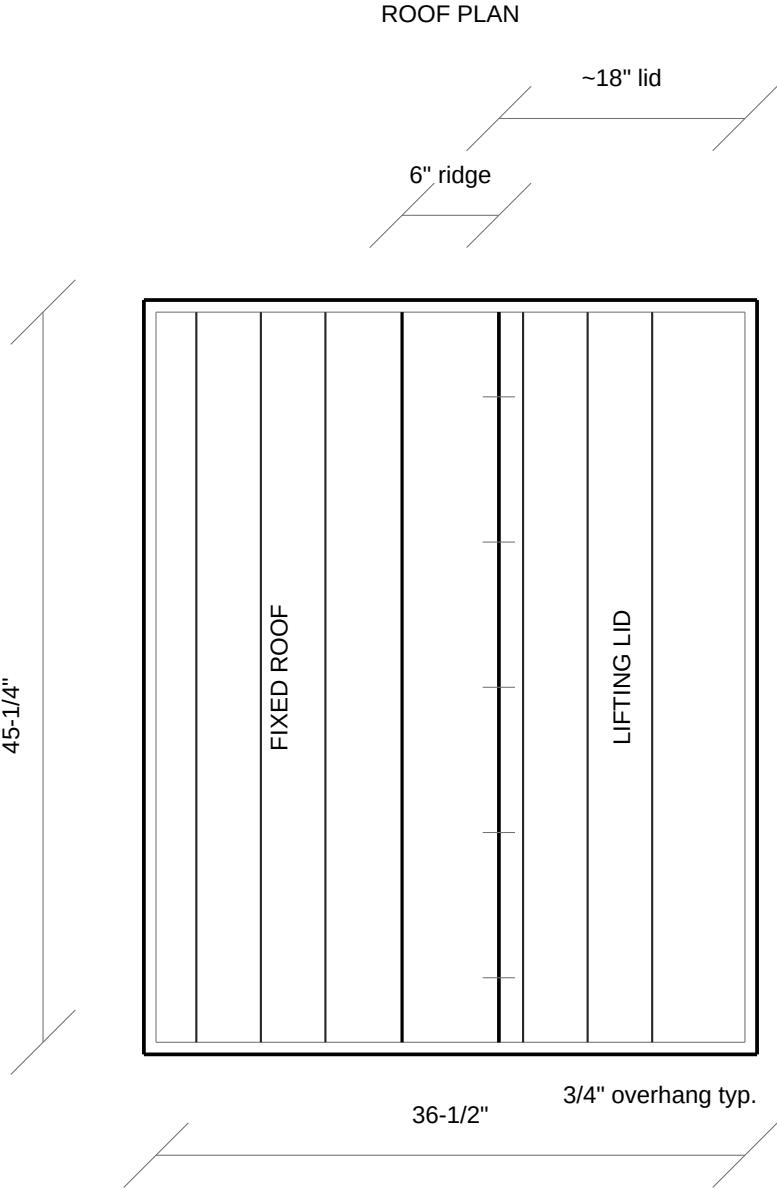



CROSS SECTION

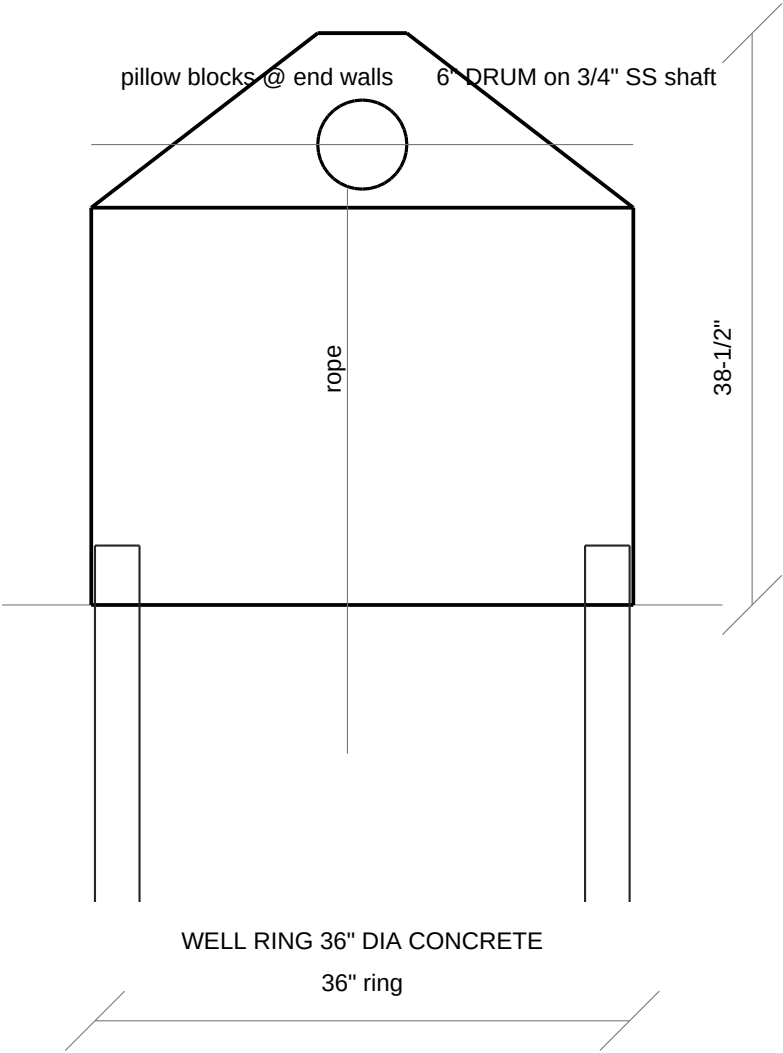


STRUCTURAL FRAME — 1-5/8" STRUT CHANNEL (drawn to thickness)

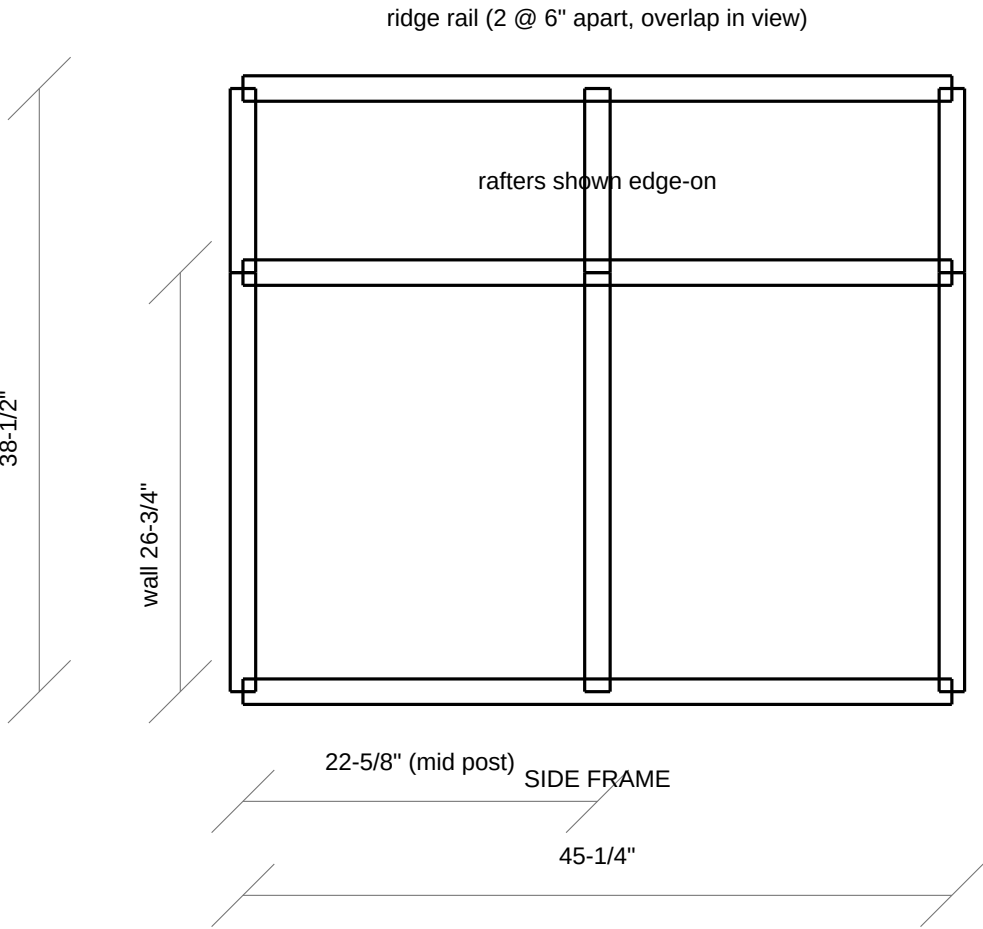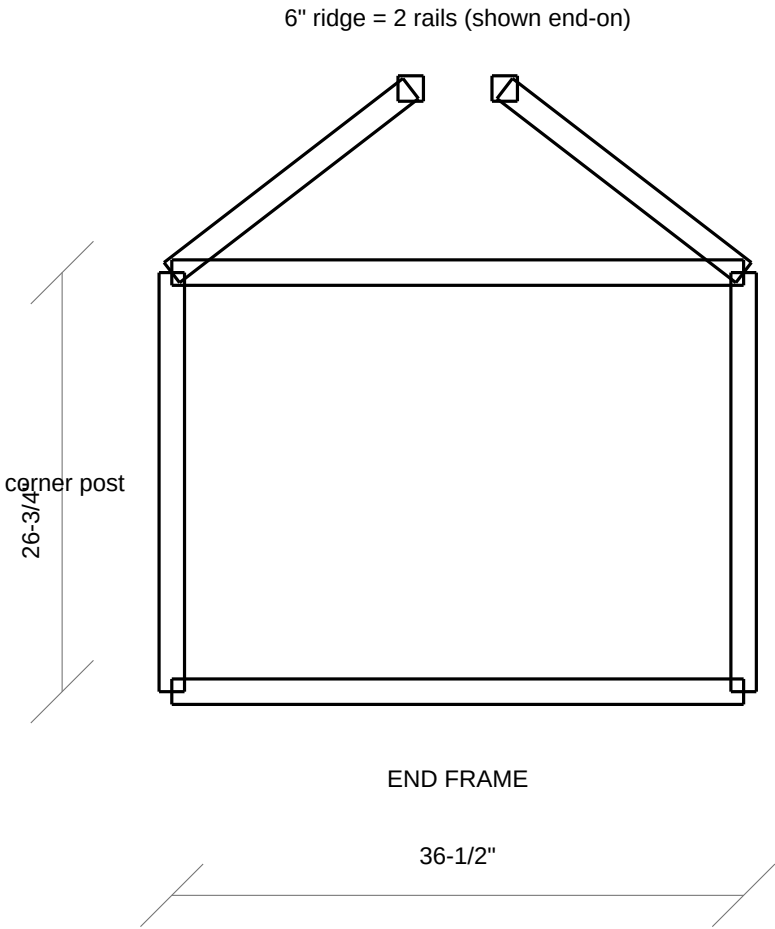



STRUT SECTION + TYPICAL CONNECTION

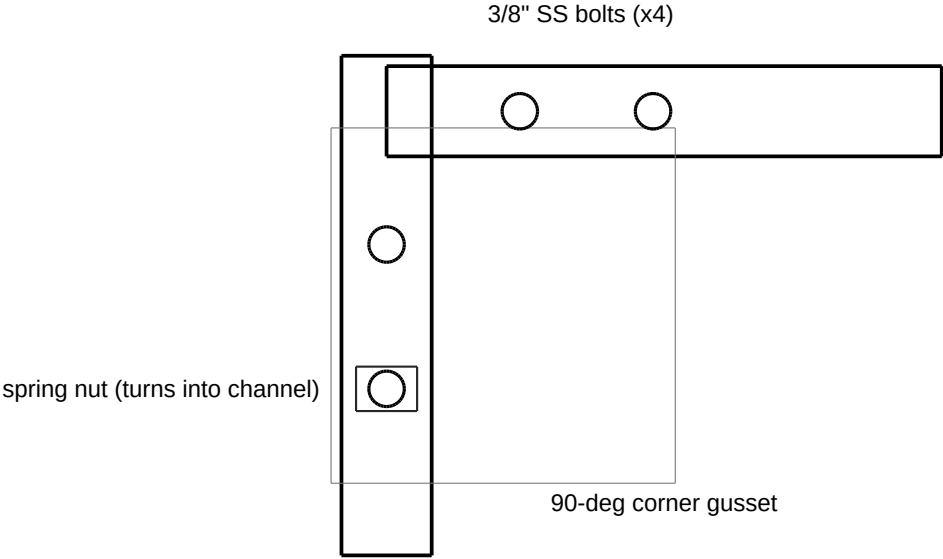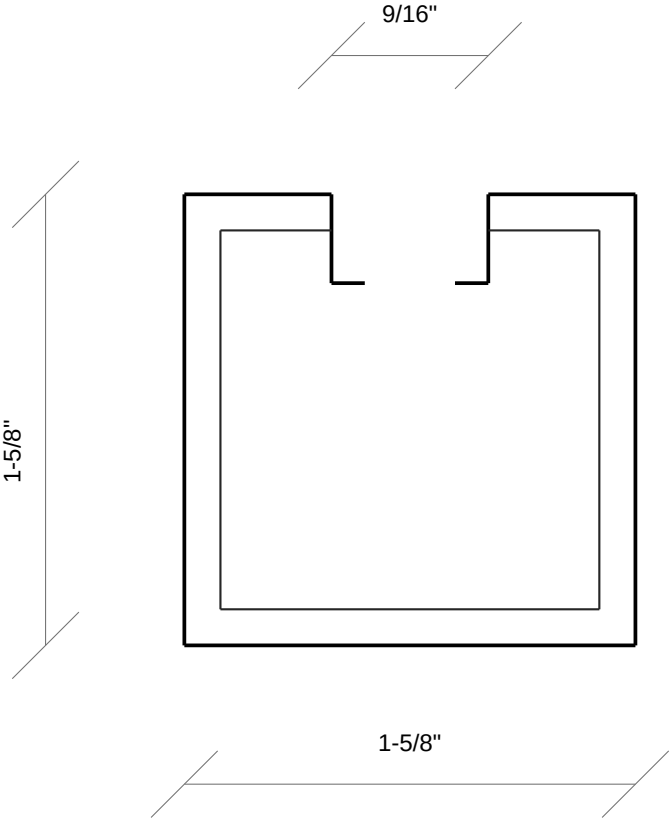

SECTION — 12 ga galv. (Unistrut P1000 / equiv.)

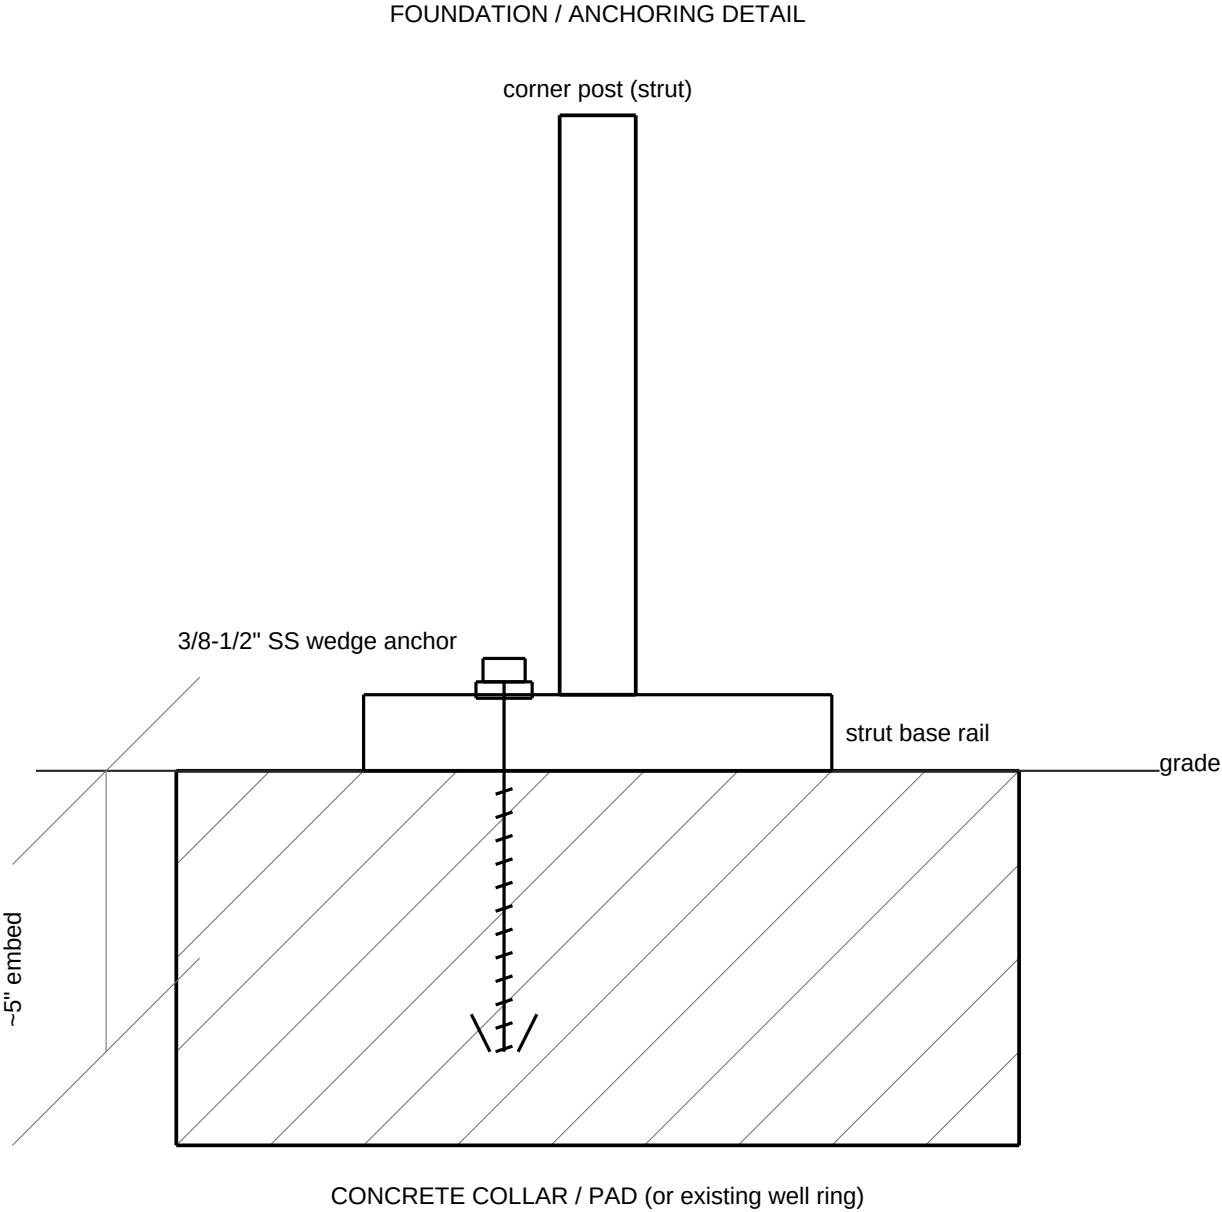



DRUM + BEARING MOUNT DETAIL

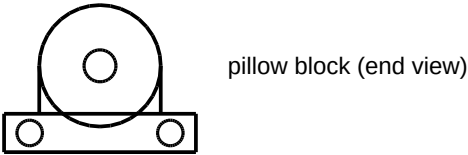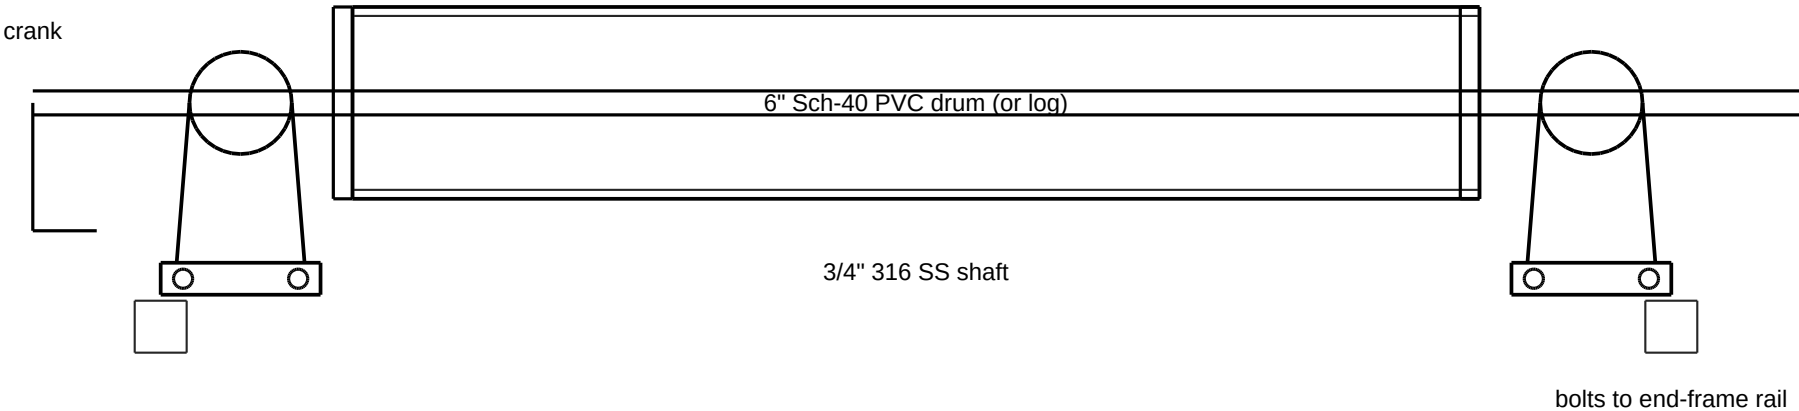

sealed 3/4" bore + 2 mounting bolts

EXPLODED ASSEMBLY (build order, bottom-up)

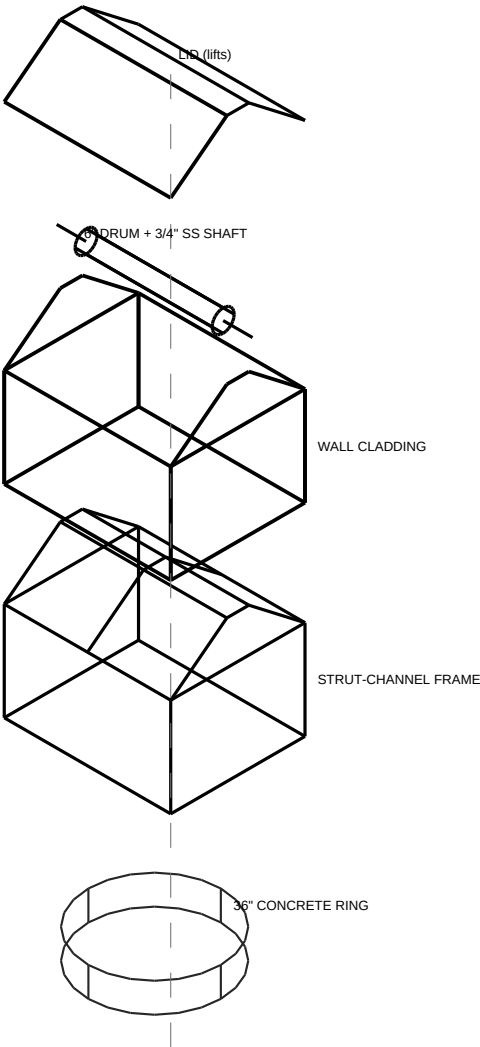

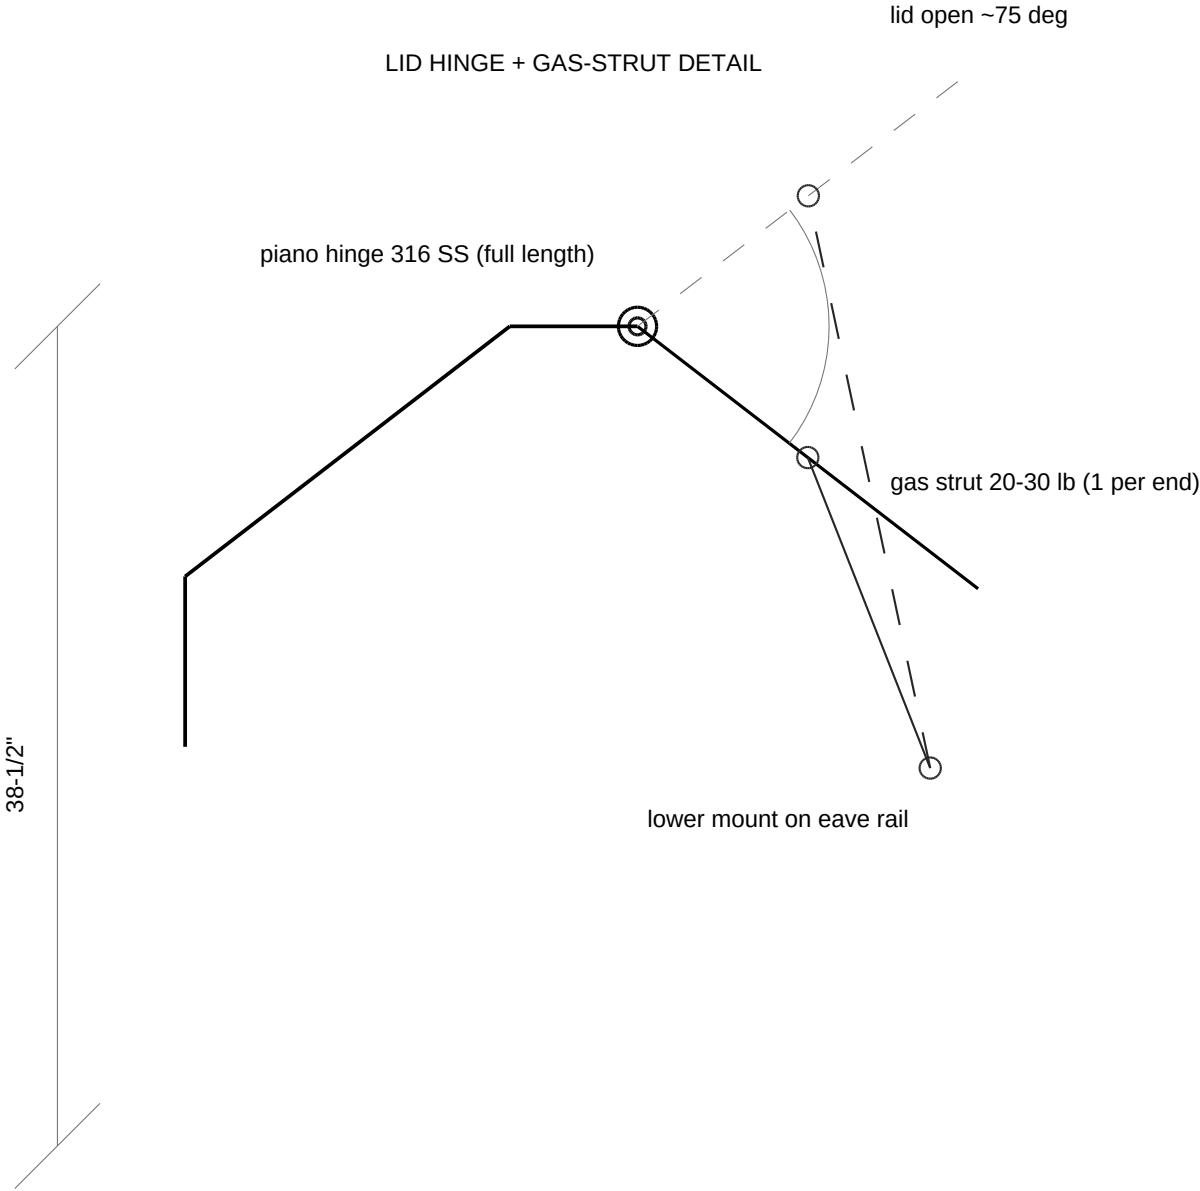

WELL HOUSE — measured rebuild (36-1/2 x 45-1/4)

CUT LIST / MATERIALS / HARDWARE | FrameCAD demo | NTS-fit, dims in ft-in

STRUCTURAL FRAME — 1-5/8" GALV. STRUT CHANNEL

MEMBER	LEN(in)	QTY
Base perimeter (long)	45.25	2
Base perimeter (end)	36.5	2
Top/eave rail (long)	45.25	2
Top/eave rail (end)	36.5	2
Corner post	26.75	4
Mid gable post	26.75	2
Rafter (sloped)	19	6
Ridge rail	45.25	2
Ridge spacer (6" cap)	6	3

Order 7 x 10ft strut sticks (70.0 lin-ft, 15.5% offcut waste)

CLADDING / ROOF

Wall cladding — T&G PVC (AZEK-type)	38.9 sqft
Roof — standing-seam aluminum panel	14.9 sqft
Roof substrate — 1/2" PVC sheet (under lid)	7.5 sqft

HARDWARE / MECHANISM

Pillow block bearing, 3/4" 316 SS	2 ea
Shaft, 3/4" 316 SS x 50"	1 ea
Drum: 6" Sch-40 PVC x 42" (or keep log)	1 ea
HDPE/PVC drum end disk	2 ea
Piano hinge, 316 SS x 45"	1 ea
Gas strut, 20-30 lb + ball mounts	2 set
Strut 90-deg corner gusset	16 ea
Strut spring nut + 3/8" SS bolt	48 set
Strut end cap	8 ea
316 SS cladding screws (#8 x 1-5/8")	2 box
Crank handle assembly (reuse/rebuild)	1 ea

Frame = strength. Wall/roof materials are swappable (PVC, cedar, metal) without changing the skeleton. All hardware 316 SS for the coastal setting.